


01x MXC RECEPTACLE - 02x PRIZM LT 32F RIBBON JUMPER

Basic characteristics

- ▲ Compact and small footprint receptacle on card-edge
- ▲ Hermaphroditic PRIZM MT ferrule
- ▲ Debris insensitivity of back-plane connection
- ▲ The PRIZM LT connector consists of a multi-fiber ferrule with a photonic turn TIR (total internal reflection) lens array

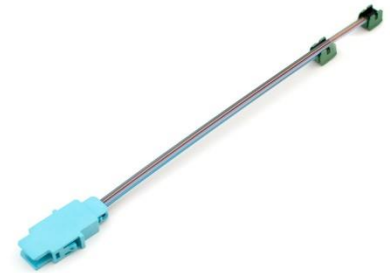

Benefits

- ▲ High density card-edge interface
- ▲ High I/O density directly on a PCB
- ▲ Low profile design
- ▲ Provides excellent coupling to high bandwidth mini-parallel optic modules

Applications

- ▲ Telecommunications
 - Servers
- ▲ Data Networking
 - Data communication centers
 - High-speed computer applications

Temperature range

Indoor controlled environment (-10°C/+60°C)

Cable parameters

Jacket material	N/A	
Cable construction	Bare ribbon	
Outer diameter	approx. 4,3mm x 0,34mm (one ribbon)	
Fiber count	2x16	
Fiber type	MMF OM3/OM4	
Temperature range	operation:	-20°C to +70°C
	storage:	-20°C to +70°C
	installation:	0°C to +70°C

01x MXC RECEPTACLE - 02x PRIZM LT 32F RIBBON JUMPER

Connector parameters

	MXC	PRIZM LT
Compliance	US CONEC standard	US CONEC standard
Colour of housing	Aqua	N/A
Colour of boot	N/A	N/A
Polish	N/A	N/A
Insertion Loss (acc. IEC 61300-3-4 method B)	<0,8dB (@850nm)	<2,0dB (@850nm)
Return Loss (GUARANTEED VALUE)	>25dB (@850nm)	N/A

Identification

Marking sleeve with unique serial number.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

MXC, PRIZM LT is a registered trademark of US Conec, Ltd.
* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk