


Drop cable – LC – IP LCD 2 Fibers patch cord

Basic characteristics

- ▲ Constructed of high-quality components
- ▲ IP LCD side is IP68 rated
- ▲ Safe Lock Ring feature for tamperproof protection
- ▲ Max. connector pull force for IP LCD 400N
- ▲ UV resistance

Applications

- ▲ Harsh environment
- ▲ Fibre To The Antenna
- ▲ Broadcasting
- ▲ Telecom
- ▲ Renewable energy

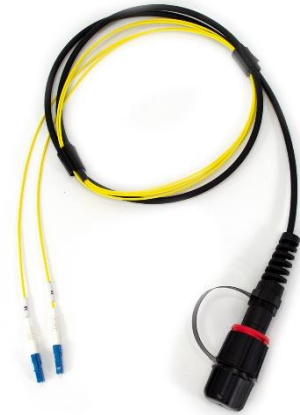

Temperature range

Outdoor environment (-40°C /+70°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Universal round cable	
Outer diameter	4.8mm	
Fiber Count	2	
Fiber type	SMF OS2	
Lenght	3m, 5m or on request	
Temperature range	operation:	-40°C to +70°C
	storage:	-40°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	IP LCD SM	LC/LCD SM
Compliance	Telcordia GR-326	Telcordia GR-326
Colour of housing	Blue / Green	Blue / Green
Colour of boot	N/A	White
Polish	Flat SM (UPC) / Angled SM (APC)	Flat SM (UPC) / Angled SM (APC)
Insertion Loss (IEC 61300-3-4 method B)	<0.25dB (@1310/1550nm)	<0.25dB (@1310/1550nm)
Return Loss (IEC 61300-3-6)	>50dB (UPC) / >60dB (APC) (@1310/1550nm)	>50dB (UPC) / >60dB (APC) (@1310/1550nm)

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

*Specifications are subject to change without notice

For more information, contact our sales team at sales@sylex.sk