


MARKING SLEEVE [01-24]
APPLICABLE ONLY FOR 24F VERSION

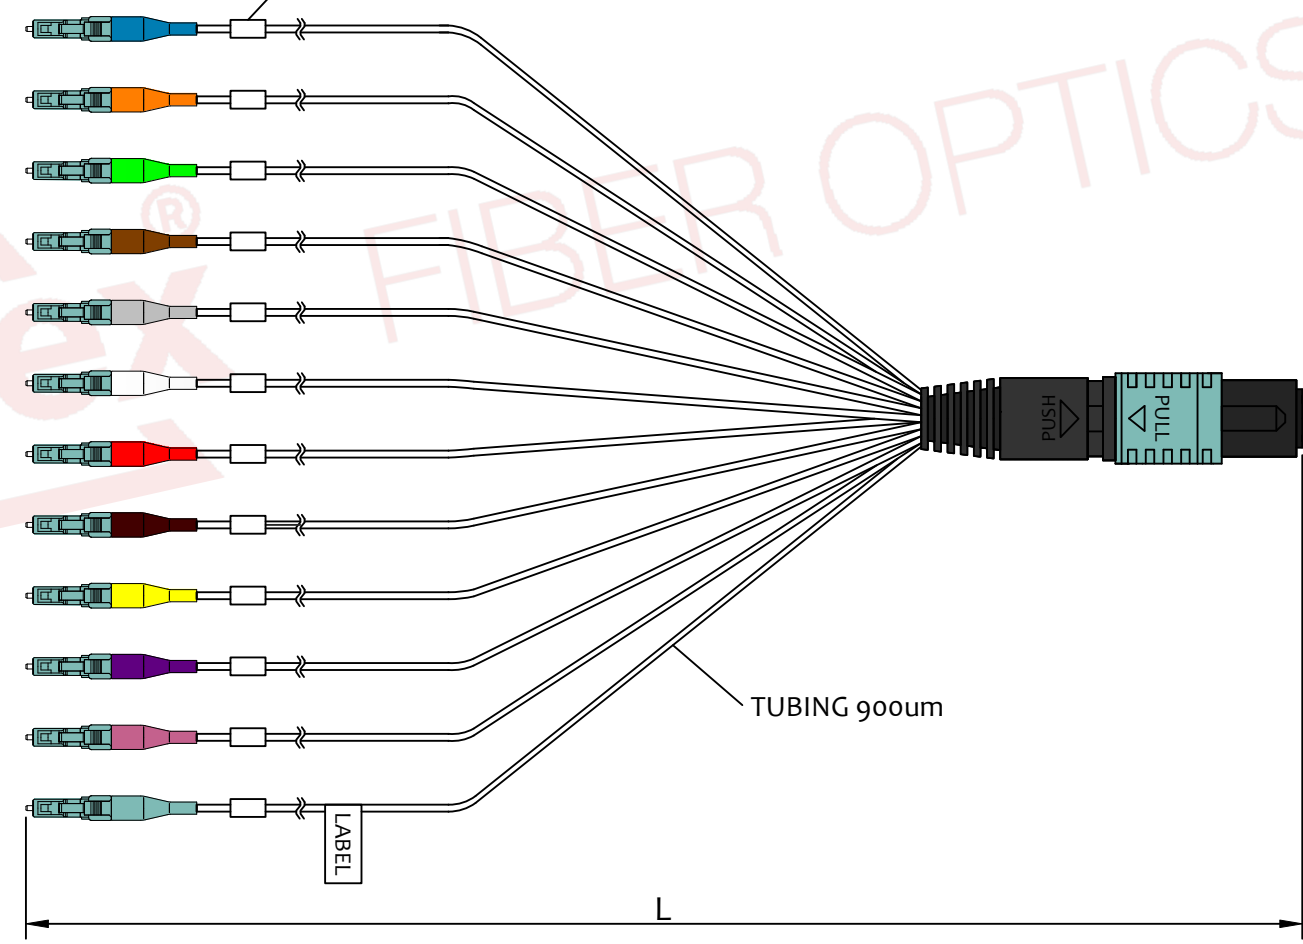


NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - LC: OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm
LC: OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
MTP: OM3, OM4, OM5 - IL<0.35dB , RL>20dB , 850nm & 1300nm
MTP: OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6 (for harnesses shorter than 1.8m the values are guaranteed – not measured)
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
ACCORDING TO SYLEX STANDARD [1-S-0011](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

ORDERING CODE

FXXX-XX9-xxxx-D

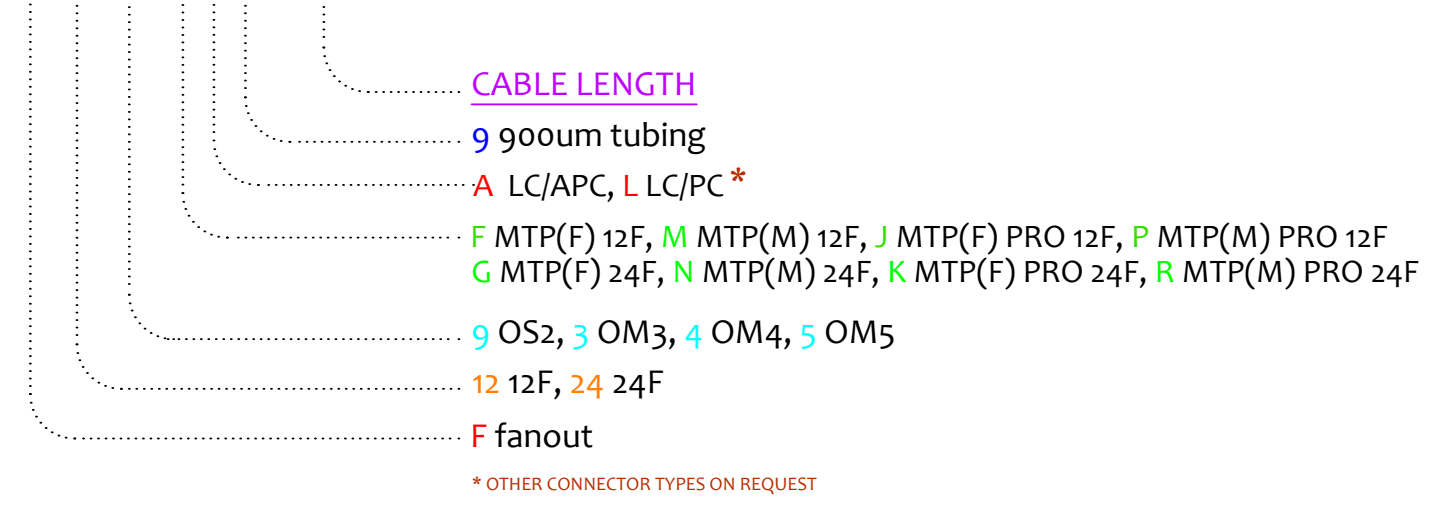

REVISION-DATE: A - 18.09.2020 CHANGE: New drawing	DRAWN BY, DATE: M.Ruzbarsky 2020/09/18	TITLE: MTP to LC 900um 12/24-fiber direct split		
REVISION-DATE: _____ CHANGE: _____	CHECKED BY, DATE: Pavlov/Matúš	APPROVED BY, DATE: I.Brestovanská	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED
REVISION-DATE: X - DD.MM.YYYY CHANGE: _____	PRODUCT NUMBER: FXXX-XX9-xxxx-D	DRAWING NUMBER: 1-W-2809_1_A	SCALE: NO SCALE	SHEET NO. 1 of 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED				SIZE A3