


SIDE A

SIDE B

TYPE A

PRIZM LT 1	MTP	PRIZM LT 2	MTP
1	1	1	13
2	2	2	14
3	3	3	15
4	4	4	16
5	5	5	17
6	6	6	18
7	7	7	19
8	8	8	20
9	9	9	21
10	10	10	22
11	11	11	23
12	12	12	24

PRIZM LT 3	MTP	PRIZM LT 4	MTP
1	25	1	37
2	26	2	38
3	27	3	39
4	28	4	40
5	29	5	41
6	30	6	42
7	31	7	43
8	32	8	44
9	33	9	45
10	34	10	46
11	35	11	47
12	36	12	48

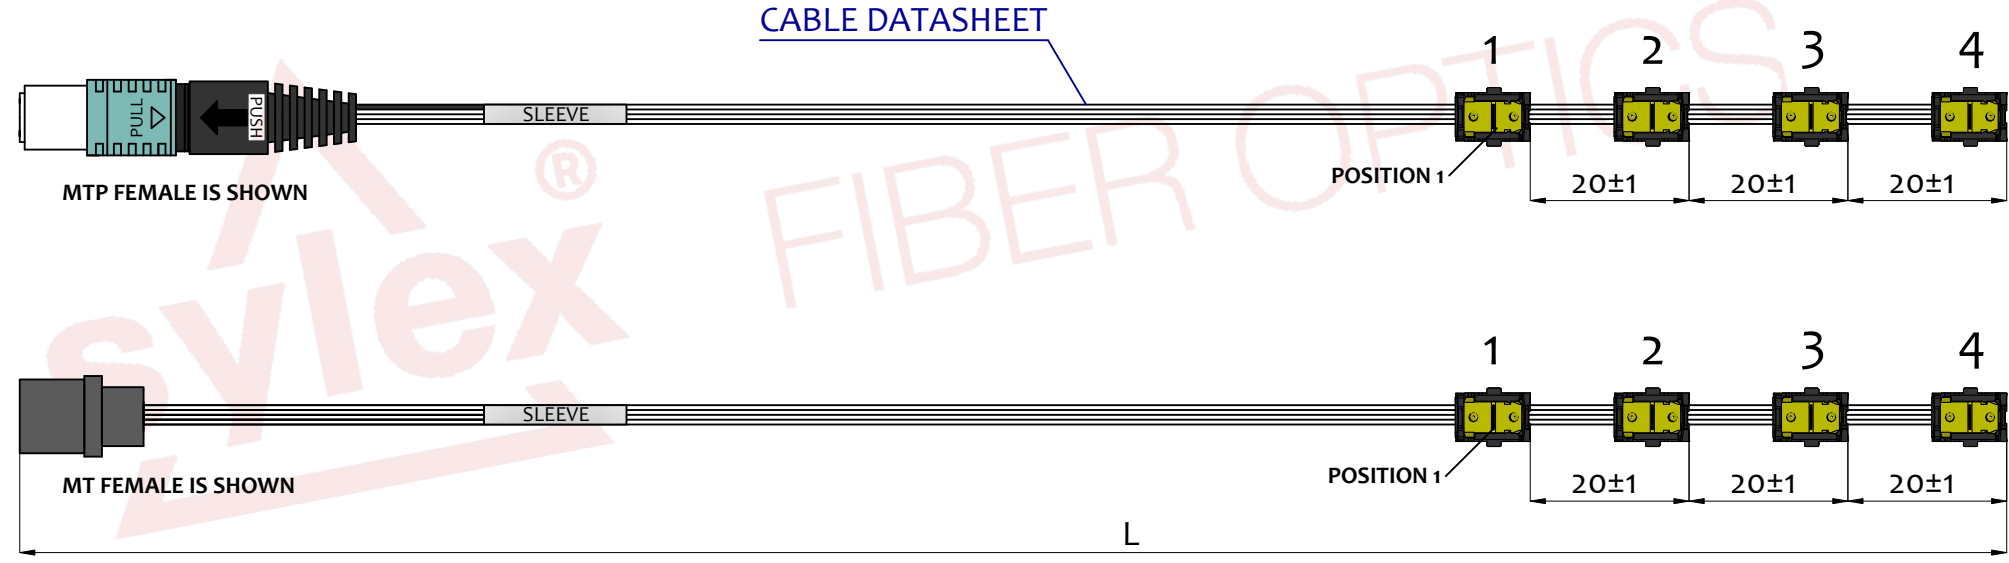

ORDERING CODE

B48X-OXX-xxxx-XX

- A Type A, X Polarity on customer demand
- 1 RIBBON PEELABLE, 2 RIBBON NON-PEELABLE
- CABLE LENGTH
- 1 MTP SHORT BOOT, 2 MTP STANDARD BOOT, X N/A
- 2 MTP FEMALE, 3 MTP MALE
- E MT FEMALE, H MT MALE
- 0 PRIZM LT (low profile housing)
- 3 OM3, 4 OM4
- 48 48F
- B On-Board Optics

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 (PRIZM LT) - IL<2.0dB , 850nm (CONNECTOR VALUE)  
OM3, OM4 (MTP) - IL<0.6dB , 850nm (CONNECTOR VALUE)  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
- 3 - MTP VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35  
MTP END FACE GEOMETRY ACCORDING TO IEC 63267-3-31
- 4 - CUMULATIVE TEST REPORT OF MEASURED IL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 5 - ASSEMBLY PACKED IN SEALED PE BAG  
BULK PACK IN OUTER CARDBOARD BOX
- 6 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.03 -0.00
+1.01m	+0.06 -0.00

REVISION-DATE: A - 17.03.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/10/14	TITLE: 01x MT/MTP - 04x PRIZM LT 48F JUMPER		
New drawing		CHECKED BY, DATE: Matus/Smelh. 2020/10/14			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: L.Miskerik 2020/10/14	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: B48X-OXX-xxxx-XX	DRAWING NUMBER: 1-W-1875_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3