


**NOTES :**

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - IL<0.25dB, LC/UPC - RL>50dB, LC/APC - RL>60dB, 1310nm & 1550nm  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

**ORDERING CODE**

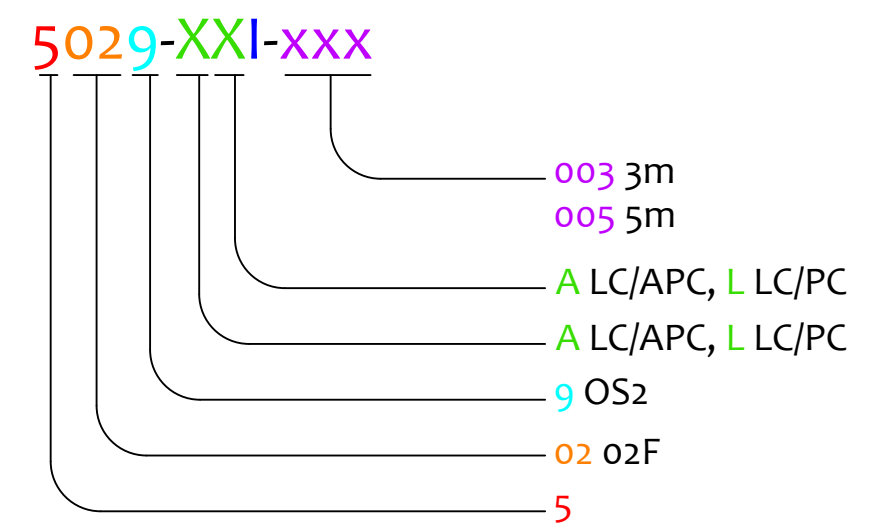

REVISION-DATE: A - 07.02.2022	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2022/02/07	TITLE: 01x LCD/UPC IP - 02x LC/UPC 02F OS2 PRETERM (for FTTA)		
New drawing		CHECKED BY, DATE: L.Miskerik	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT NUMBER: 5029-xxl-xxx	DRAWING NUMBER: 1-W-8969_1_A	SHEET NO. 1 of 1
REVISION-DATE:	CHANGE:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SIZE A3