


NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM4 - IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,
BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON WOODEN REEL [1-S-8277](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES
ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - PULLING SYSTEM FROM BLACK TUBE IS ON BOTH SIDES OF THE ASSEMBLY (NOT SHOWN)
OUTER DIAMETER OF THE PULLING TUBE IS 34,8mm
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,
DATE OF PRODUCTION AND ASSEMBLY LENGTH
- 9 - FOR THE FIXATION OF THE PRODUCT TO THE 1U PANEL IT IS NECESSARY TO USE ACCESSORIES

Nr.	FIBRE LENGTH
1-4	840 ±40
5-8	800 ±40
9-12	760 ±40
13-16	720 ±40
17-20	680 ±40
21-24	640 ±40

ORDERING CODE

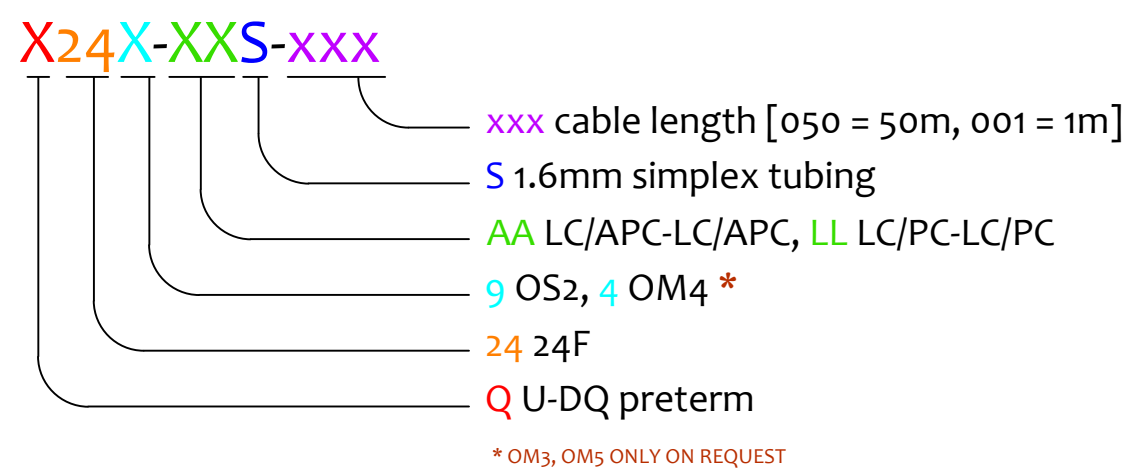

REVISION-DATE: A - 06.10.2023	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2023/06/10	TITLE: 24f LC-LC U-DQ PRETERM		
New drawing		CHECKED BY, DATE: M.Bombarova 2023/06/10			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh. 2023/06/10	PRODUCT SPECIFICATION: QPN - 000	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: Q24X-XXS-xxx	DRAWING NUMBER: 1-W-9581_1_A	SHEET NO.: 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE: A3