


SIDE A

SIDE B

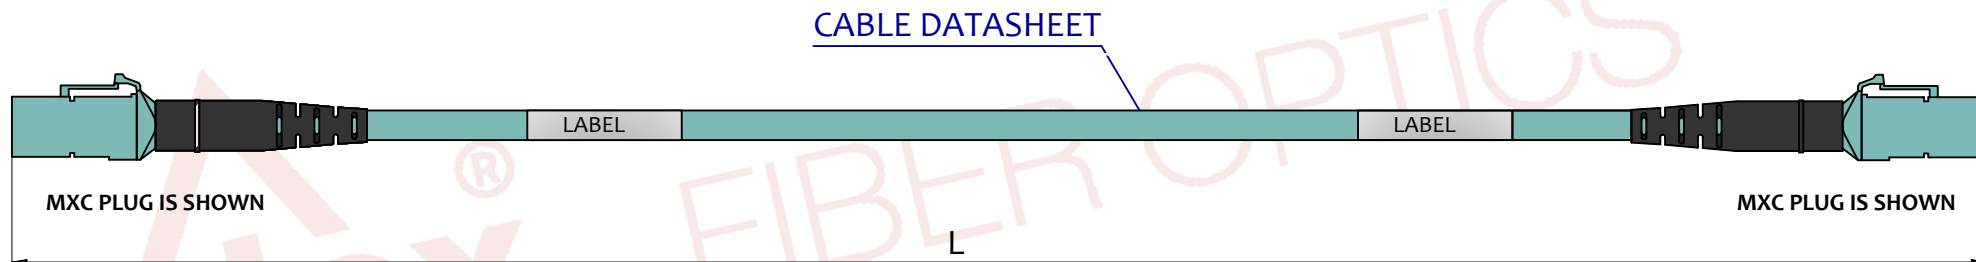

CONNECTION TYPE A

TYPE A	
SIDE A	SIDE B
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16

CONNECTION TYPE A

TYPE A	
SIDE A	SIDE B
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32

CONNECTION TYPE B

TYPE B	
SIDE A	SIDE B
1	16
2	15
3	14
4	13
5	12
6	11
7	10
8	9
9	8
10	7
11	6
12	5
13	4
14	3
15	2
16	1

CONNECTION TYPE B

TYPE B	
SIDE A	SIDE B
17	32
18	31
19	30
20	29
21	28
22	27
23	26
24	25
25	24
26	23
27	22
28	21
29	20
30	19
31	18
32	17

ORDERING CODE

B32X-XXX-xxx-3X

- B** On-Board Optics
- 32** 32F
- 3** OM3, **4** OM4
- Q** MXC PLUG, **Y** MXC PLUG PROTRUDED
- Q** MXC PLUG, **Y** MXC PLUG PROTRUDED
- xxx** cable length [001 = 1m, 0015 = 1.5m]
- 3** ROUND CABLE
- A** Type A, **B** Type B

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - OM3, OM4 - IL<0.8dB , RL>25dB , 850nm (CONNECTOR VALUE)
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 3 - CUMULATIVE TEST REPORT OF MEASURED IL, RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 4 - ASSEMBLY PACKED IN SEALED PE BAG
BULK PACK IN OUTER CARDBOARD BOX
- 5 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.03 -0.00
+1.01m	+0.06 -0.00

REVISION-DATE: A - 04.07.2020 CHANGE: New drawing	DRAWN BY, DATE: M.Ruzbarsky 2020/07/04	TITLE: 01x MXC - 01x MXC 32F JUMPER		
REVISION-DATE: CHANGE:	CHECKED BY, DATE: Matus/Smelh. 2020/03/17	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: CHANGE:	APPROVED BY, DATE: L.Miskerik 2020/03/17	PRODUCT NUMBER: B32X-XXX-xxx-3X	DRAWING NUMBER: 1-W-7911_1_A	SHEET NO. 1 of 1
REVISION-DATE: CHANGE:	A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
				SIZE A3