


CROSS CONNECTION		STRAIGHT CONNECTION	
CONNECTION TABLE		CONNECTION TABLE	
MTP	LC	MTP	LC
MTP 1-1	1B	MTP 1-1	1A
MTP 1-2	1A	MTP 1-2	1B
...
...
MTP 4-11	24B	MTP 4-11	24A
MTP 4-12	24A	MTP 4-12	24B

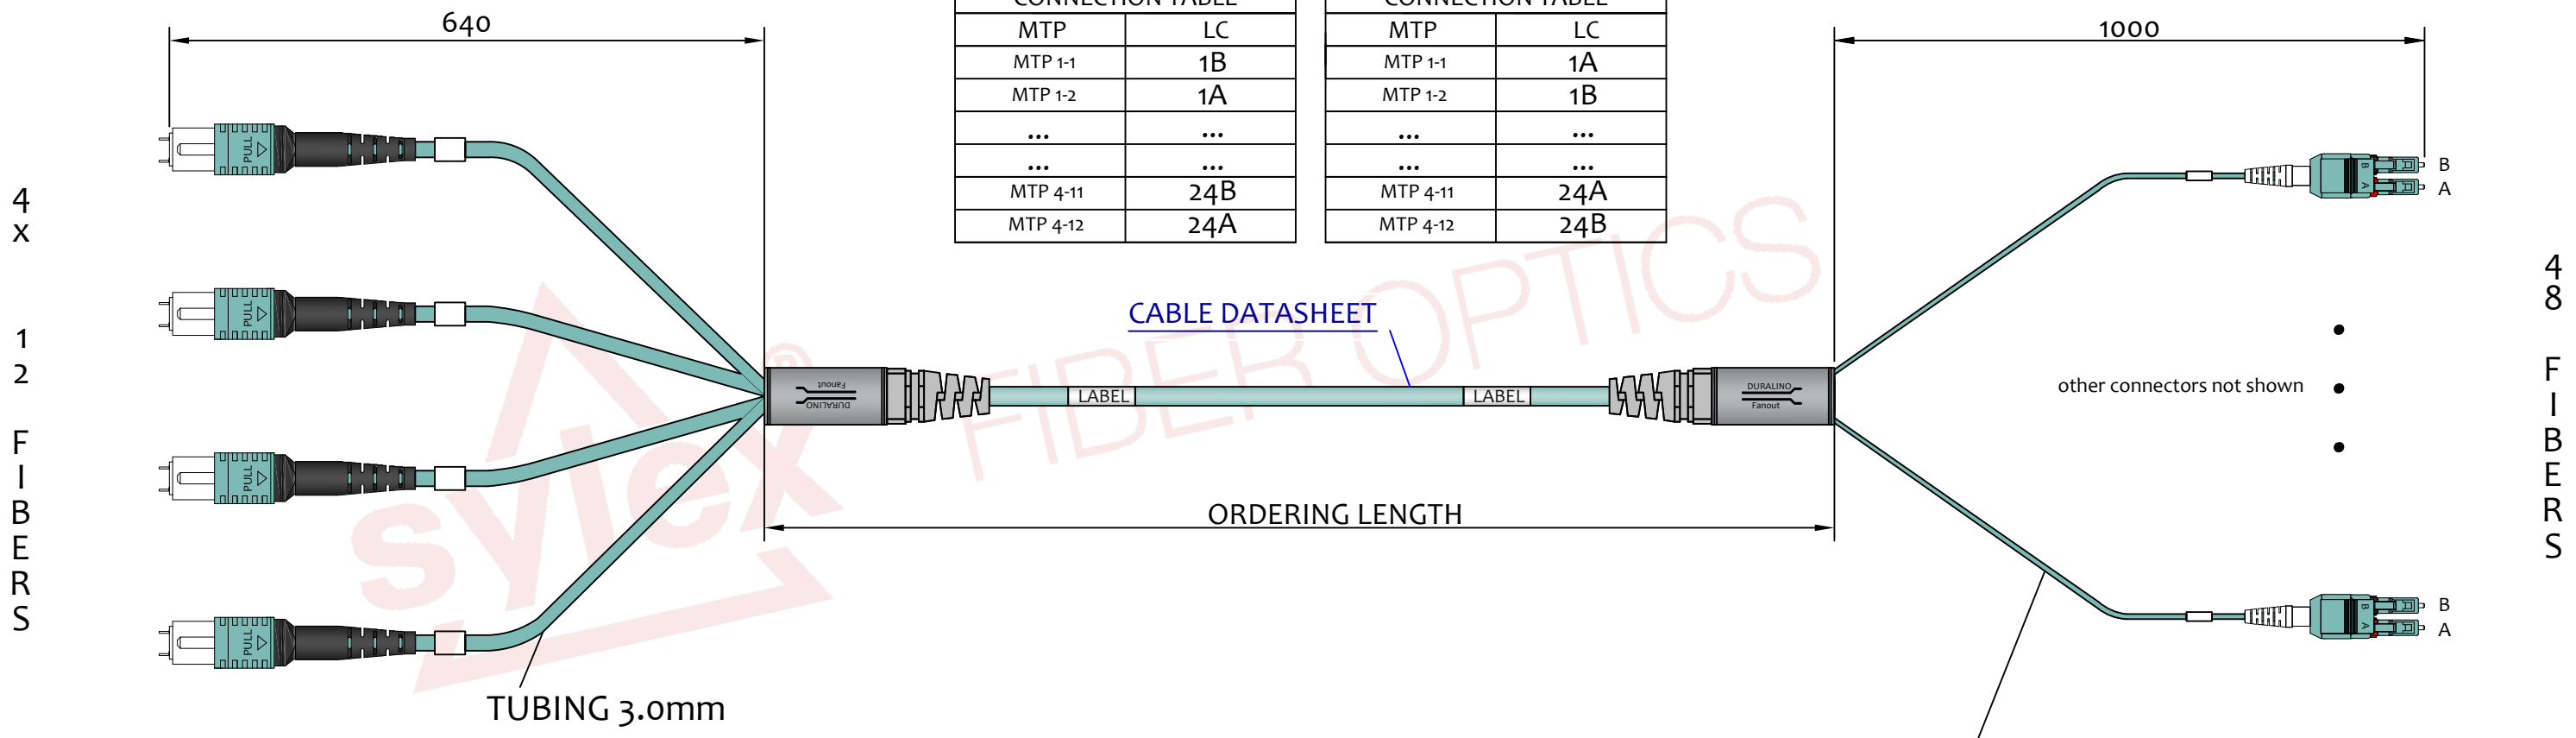

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - LC: OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm
LC: OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm

MTP: OM3, OM4, OM5 - IL<0.35dB , RL>20dB , 850nm & 1300nm
MTP: OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,
BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL,
INSERTED IN CARDBOARD BOX ACCORDING TO SYLEX STANDARD [1-S-0011](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - PULLING SYSTEM ON LC SIDE IS PART OF THE ASSEMBLY (NOT SHOWN)
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

ORDERING CODE

X48X-XXU-xxx-X

- S - straight connection, C - cross connection
 - xxx cable length [050 = 50m, 001 = 1m]
 - U 2.0mm uniboot tubing
 - A LC/APC, L LC/PC *
 - F MTP(F) 12F, M MTP(M) 12F,
J MTP(F) PRO 12F, P MTP(M) PRO 12F
 - 9 OS2, 3 OM3, 4 OM4, 5 OM5
 - 48 48F
 - F fanout, H fanout with grommet **
- * OTHER CONNECTOR TYPES ON REQUEST
** SHOWN TRUNK VERSION WITH GROMMET [H]

REVISION-DATE: A - 04.06.2019	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2019/06/04	TITLE: 48f 4xMTP-LC Duralino fanout – uniboot		
New drawing		CHECKED BY, DATE: Pavlov/Matúš	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská	PRODUCT NUMBER: X48X-XXU-xxx	DRAWING NUMBER: -	SHEET NO. 1 of 1
REVISION-DATE: X - DD.MM.YYYY	CHANGE:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		SIZE A3