


Plastic distribution box

Basic characteristics

- ▲ Constructed of high-quality Polycarbonate material
- ▲ IP 66/IP 67 Water immersion protection
- ▲ Stainless steel screws for cover fixation
- ▲ Cover with PUR seal
- ▲ Chemical, Electrical and UV resistance

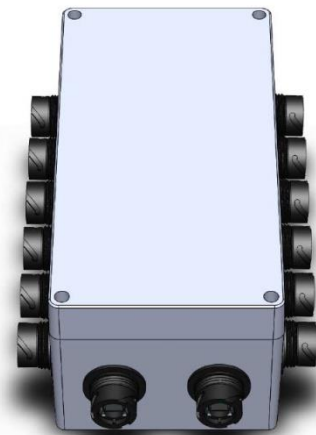

Applications

- ▲ Harsh environment
- ▲ Fiber to Antenna
- ▲ Military
- ▲ Broadcasting
- ▲ Medical
- ▲ Oil and Gas
- ▲ Transport
- ▲ Renewable energy

Temperature range

Outdoor environment (-40°C/+80°C)

Material parameters

Material	Polycarbonate
Colour	Grey (RAL 7035)
Impact resistance	IK07 / IK08
Electrical resistance	Complete resistance
UV resistance	UL 508
Fire classification	UL 746C 5"
Temperature range	-40°C to +80°C

Box dimensions

Width	124 mm
Length	244 mm
Height	102 mm

Available capacity of IP adaptors

IP MPO adaptors	2 adaptors	Front installation
IP LC duplex adaptors	6 adaptors	Left-side installation
	6 adaptors	Right-side installation

Identification

Traceability label with unique serial number on bottom of the box (inside).

Packaging

Each plastic box is packed in a cardboard box.

*Specifications are subject to change without notice

For more information, contact our sales team at sales@sylex.sk