


CONNECTION TYPE
A - TYPE A (1-1,...16-16)
B - TYPE B (1-16,...16-1)

ORDERING CODE

V16X-XXB-xxxx-X

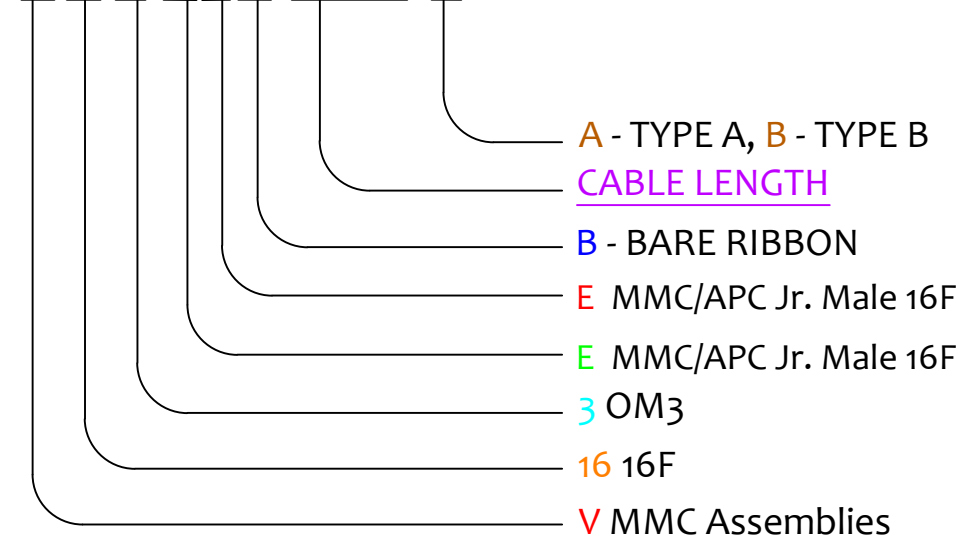

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - IL<0.35dB , RL>20dB (GUARANTEED VALUE) , 850nm & 1300nm
 IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method D
 RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
 END FACE GEOMETRY ACCORDING TO IEC 61755-3-31
- 5 - ASSEMBLY PACKED IN SEALED PE BAG
 BULK PACK IN OUTER CARDBOARD BOX

REVISION-DATE: A - 07.03.2024	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 07.03.2024	TITLE: 16f 1xMMC Jr. - 1xMMC cable Jr.		
New drawing		CHECKED BY, DATE: M.Bombarova			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: QPN - 000	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: XXXX-XXX-xxx	DRAWING NUMBER: 1-W-9885_1_A	SHEET NO. 1 of 1	
		A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
			SIZE A3		