


### STRAIGHT

CONNECTION TABLE	
MDC A	MDC B
A	A
B	B

### CROSS

CONNECTION TABLE	
MDC A	MDC B
A	B
B	A

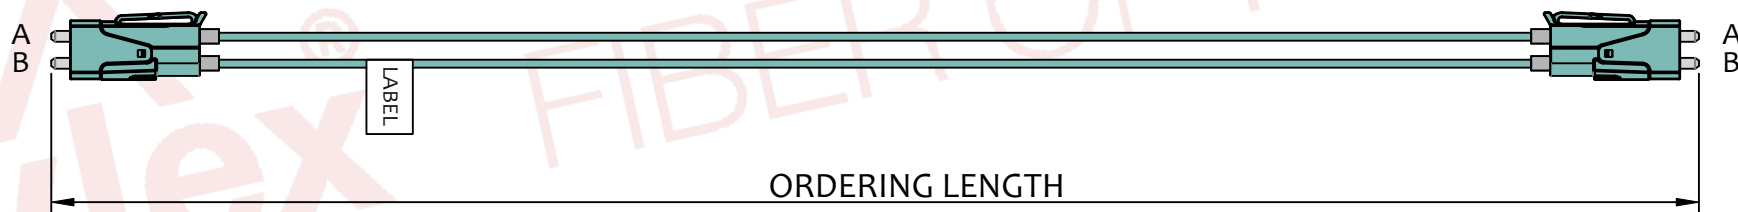

#### NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm  
OS2 - IL<0.25dB, MDC/APC - RL>60dB, 1310nm & 1550nm  
MDC/UPC - RL>50dB, 1310nm & 1550nm  
  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
- 6 - CABLE LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

### ORDERING CODE

C29X-WXX-xxx-X

- S STRAIGHT, LEAVE EMPTY FOR CROSS
- xxx cable length [001 = 1m, 0015 = 1.5m]
- W MDC (Jr), L LC/PC, A LC/APC
- W MDC (Jr)
- 9 OS2, 3 OM3, 4 OM4, 5 OM5
- 9 0.9mm
- 2 DUPLEX
- C PATCHCORD

REVISION-DATE: A - 11.11.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/11/11	TITLE: 2f MDC Duplex Patchcord		
New drawing		CHECKED BY, DATE: L.Miskerik			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: C29X-WXX-xxx-X	DRAWING NUMBER: 1-W-8165_1_A	SHEET NO. 1 of 1	
A			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
			SIZE A3		