


## STRAIGHT

CONNECTION TABLE	
MDC A	MDC B
A	A
B	B

## CROSS

CONNECTION TABLE	
MDC A	MDC B
A	B
B	A

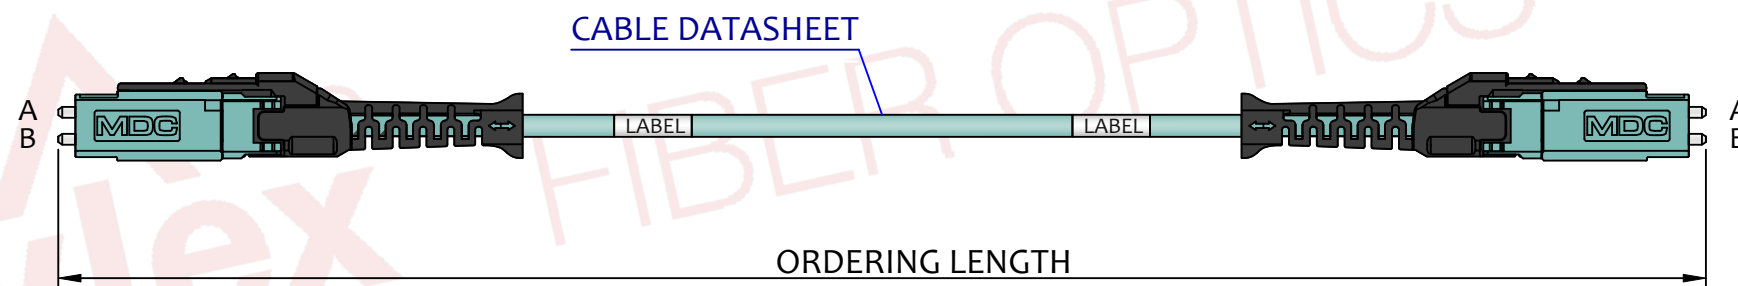

## NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm  
OS2 - IL<0.25dB, MDC/APC - RL>60dB, 1310nm & 1550nm  
MDC/UPC - RL>50dB, 1310nm & 1550nm  
  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
- 6 - CABLE LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

## ORDERING CODE

C22X-VXU-xxx-X

- S STRAIGHT, LEAVE EMPTY FOR CROSS
- xxx cable length [050 = 50m, 001 = 1m]
- U LC UNIBOOT, X FOR MDC-MDC ONLY
- V MDC (Sr), L LC/PC, A LC/APC
- V MDC (Sr)
- 9 OS2, 3 OM3, 4 OM4, 5 OM5
- 2 1.8mm (LSZH)
- 2 DUPLEX
- C PATCHCORD

REVISION-DATE: A - 16.09.2020	CHANGE:	DRAWN BY, DATE: P. Gaspar 2020/09/16	TITLE: 2f MDC Duplex Patchcord		
NEW DRAWING		CHECKED BY, DATE: Pavlov/Matúš			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: C22X-VXX-xxx-X	DRAWING NUMBER: 1-W-8020_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3